

MOEN®

DESCRIPTION

- Showerhead is plastic construction while other elements are of metal construction
- Includes valve, showerhead, arm, and flange for model 2673
- 4 port valve body connectors are 1/2"
- Hot and cold indicator icons are etched into escutcheon

OPERATION

- Lever style handle
- Pull open, push lever to close valve
- Temperature controlled through 110 arc of handle travel

FLOW

- Showerhead is limited to 1.3 gpm (4.9 L/min) at 45 psi, 1.75 gpm (6.7 L/min) max at 80 psi

CARTRIDGE

- 35mm ceramic disk cartridge
- Nonmetallic/nonferrous and stainless steel materials


STANDARDS

- Third party certified to WaterSense® for showerhead only
- Third party certified to ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein for showerhead only

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



SPECIFICATIONS

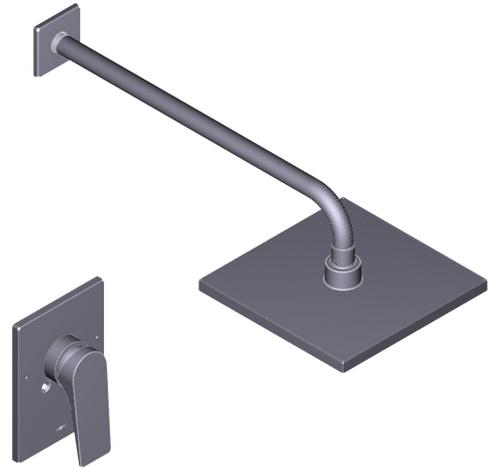

BERAT

Single- Handle Non-Pressure Balance Shower

MODELS: 2673 SERIES - Non P.B. Showerhead, Arm & Flange
2675 SERIES - Valve & Trim Only

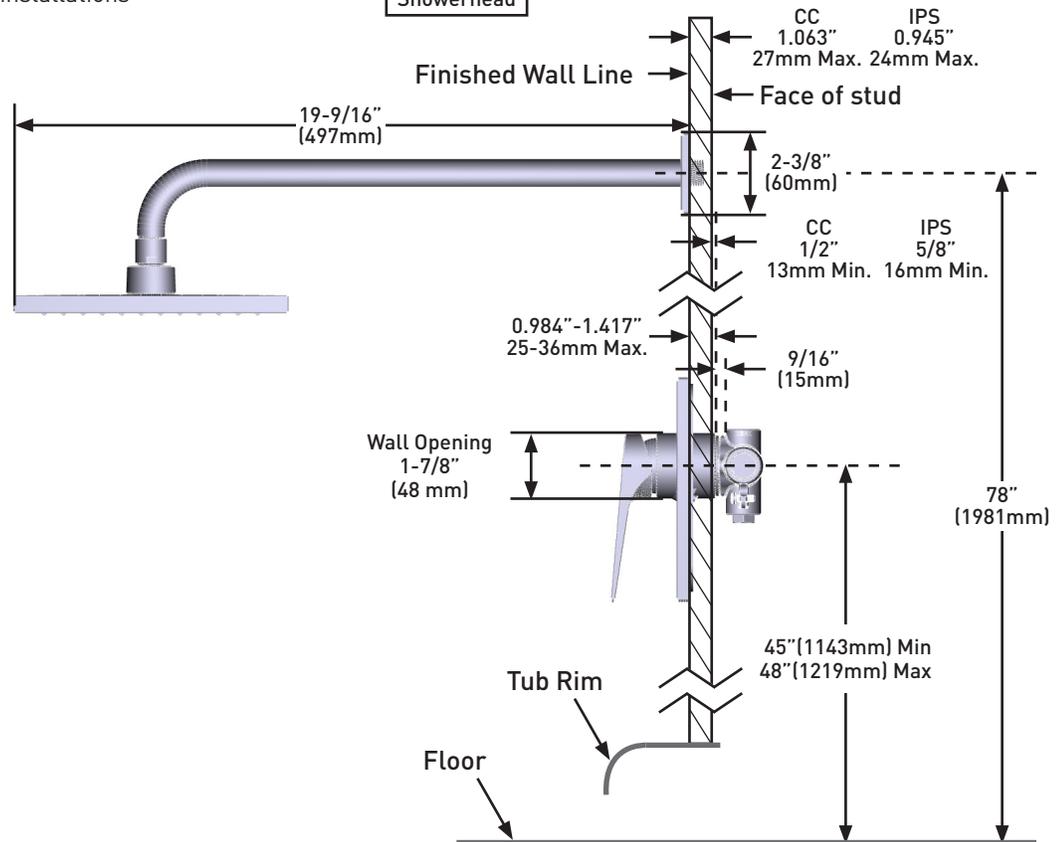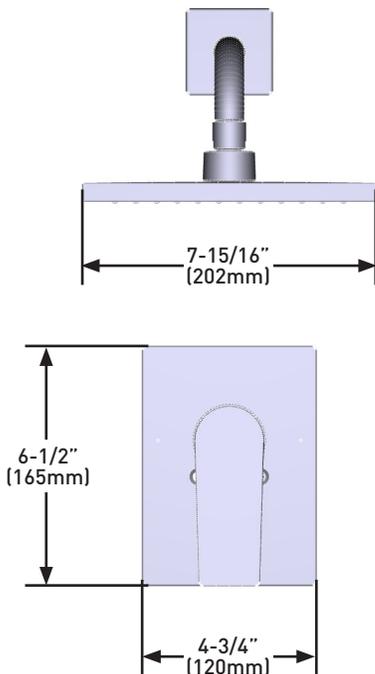

CRITICAL DIMENSIONS DO NOT SCALE