

DESCRIPTION

- Showerhead is plastic construction while other elements are of metal construction
- Includes valve, showerhead, arm, and flange for model 2773
- 4 port valve body connectors are 1/2"
- Hot and cold indicator icons are etched into escutcheon

OPERATION

- Lever style handle
- Pull open, push lever to close valve
- Temperature controlled through 1100 arc of handle travel

FLOW

- Showerhead is limited to 2.0 gpm (7.6 L/min) MAX.

CARTRIDGE

- 35mm ceramic disk cartridge
- Nonmetallic/nonferrous and stainless steel materials

STANDARDS

- Designed to meet GB standards
- ADA for lever handle

WARRANTY




- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



Arlys™

ARLYS™ 1H NON PB W SHOWER

MODELS: 2773 Series - Non P.B. SHOWER
2775 Series - Non P.B.
SHOWER TRIM & VALVE

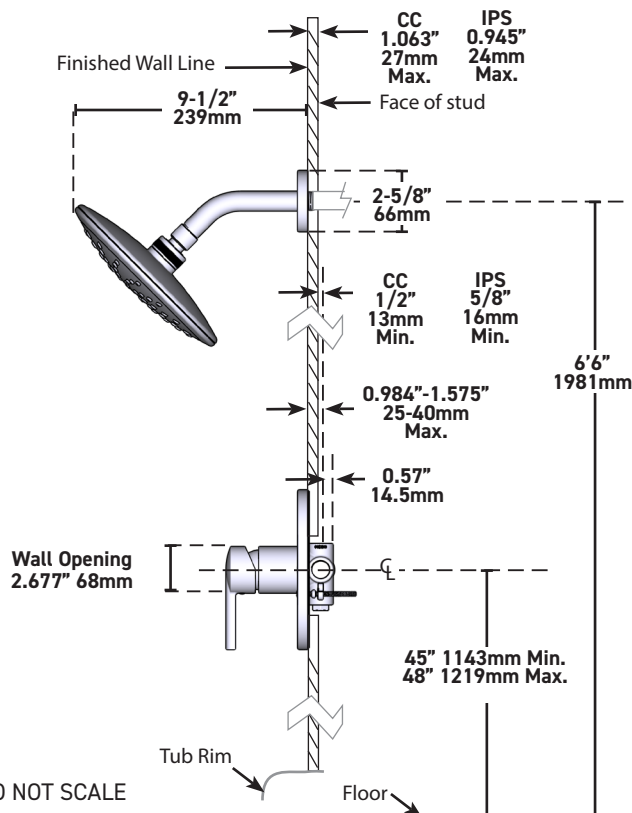

CRITICAL DIMENSIONS DO NOT SCALE