

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 4 port valve body connectors are 1/2"
- Hot and cold indicator icons are etched into escutcheon

## OPERATION

- Lever style handle
- Pull open, push lever to close valve
- Temperature controlled through 1100 arc of handle travel

## CARTRIDGE


- 35mm ceramic disk cartridge
- Nonmetallic/nonferrous and stainless steel materials

## STANDARDS

- Designed to meet GB standards
- ADA for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

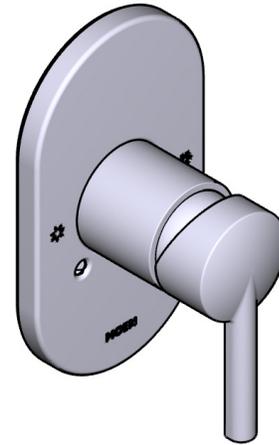


## Arlys™

ARLYS™ 1H NON PB W SHOWER

**MODELS:** 2775 - Non P.B. Shower Trim Only

**NOTE:**  
(less shower head, arm & flange)

ADA

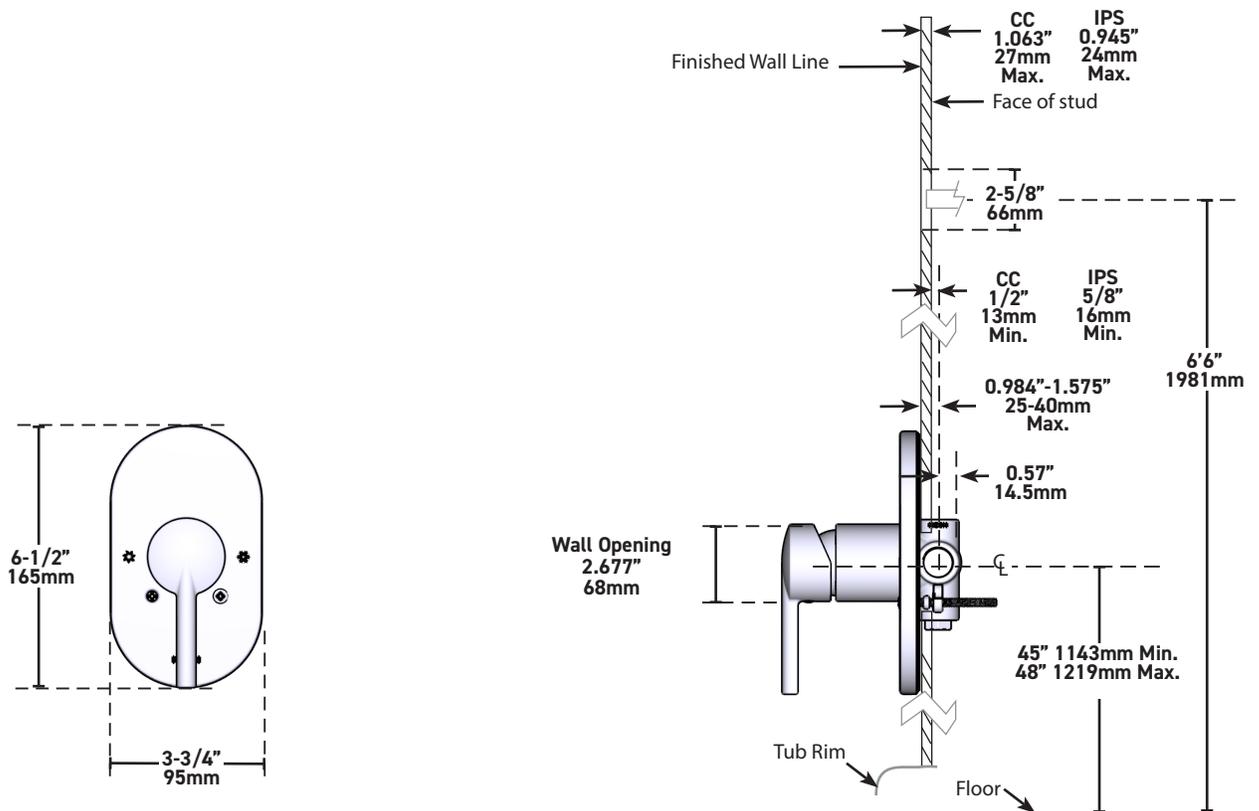

**CRITICAL DIMENSIONS** DO NOT SCALE