

MOEN®

Specifications

DESCRIPTION

- Fixed mount showerhead
- Various finishes identified by suffix
- 1/2" IPS connection

OPERATION

- Single function

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi

STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




DANIKA 2.0™

One-Function Rainshower

Models: S1738 series

IMMERSION™
rainshower technology

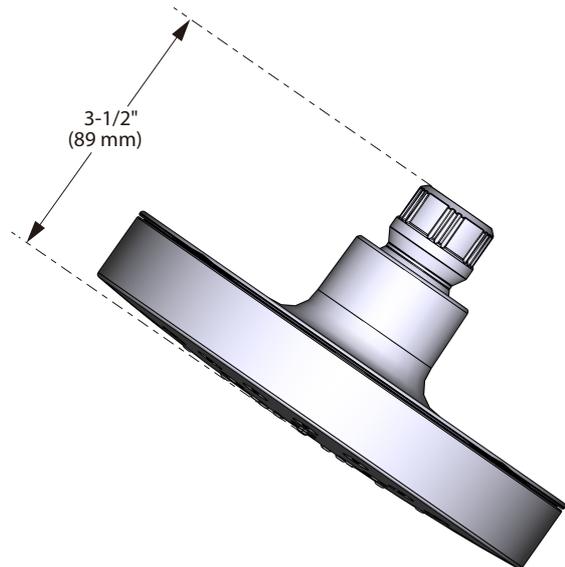

CRITICAL DIMENSIONS DO NOT SCALE